

SILVERTHIN JSA035XP0**3.5 in Sealed Type X Thin Section Bearing****Specifications**

Bore (B)	3.500 in
Outside Diameter (D)	4.000 in
Width	1/4"
Land Diameter (L ₁)	3.686 in
Land Diameter (L ₂)	3.814 in
Approximate Weight	0.18 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	4-Point Contact (Type X)
Seals, Shields	Buna N Rubber Seal
Unit System	Inch

Load Capacities


Static Radial Load	1,140 lbf
Dynamic Radial Load	700 lbf
Static Thrust Load	2,850 lbf
Dynamic Thrust Load	1,110 lbf
Static Moment Load	2,130 in-lbs
Dynamic Moment Load	985 in-lbs
Torque Max No Load	16 in-lbs

Interchange

Silverthin	JSA035XP0	Kaydon	JA035XP0	Kaydon	JA035XP0	INA	CSXA0352RS
SKF	FPXA3082RS1	FAG	L18QA3082RSD	NSK	NBX08806DD	NTN	KXA088LL
SSB	RJA035XP0						

Brass; snapover separator

1/8" balls

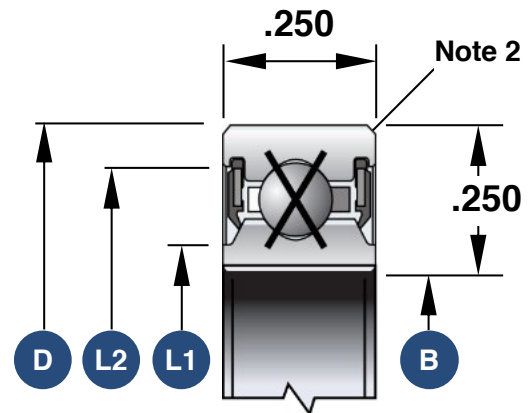

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.025"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SA035AR0
Open Radial Contact	SA035CP0
Open 4-Point Contact	SA035XP0
Sealed Radial Contact	JSA035CP0
Open Duplexed (Back-to-Back)	SA035BR0
Open Duplexed (Face-to-Face)	SA035FR0