

SILVERTHIN JSA047CP0 4.75 in Sealed Type C Thin Section Bearing

Specifications

Bore (B)	4.750 in
Outside Diameter (D)	5.250 in
Width	1/4"
Land Diameter (L ₁)	4.936 in
Land Diameter (L ₂)	5.064 in
Approximate Weight	0.22 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	Buna N Rubber Seal
Unit System	Inch

Load Capacities


Static Radial Load	1,520 lbf
Dynamic Radial Load	630 lbf
Torque Max No Load	32 in-lbs

Interchange

Silverthin	JSA047CP0	Kaydon	JA047CPO	Kaydon	JA047CPO	INA	CSCA0472RS
SKF	FPCA4122RS1	FAG	L10QA4122RSD	NSK	NBC12006DD	NTN	KRA120LL
SSB	RJA047CP0						

Brass; snapover separator

1/8" balls

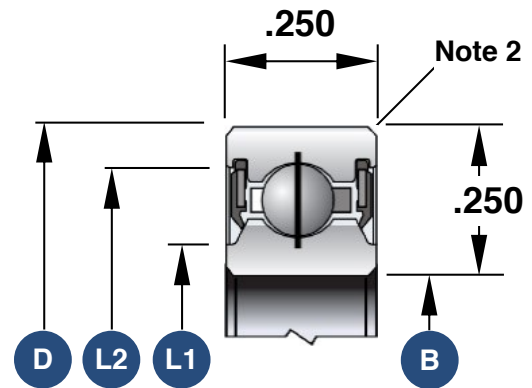

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.025"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SA047AR0
Open Radial Contact	SA047CP0
Open 4-Point Contact	SA047XPO
Sealed 4-Point Contact	JSA047XPO
Open Duplexed (Back-to-Back)	SA047BR0
Open Duplexed (Face-to-Face)	SA047FR0