

SILVERTHIN JSA060XPO**6 in Sealed Type X Thin Section Bearing****Specifications**

Bore (B)	6.000 in
Outside Diameter (D)	6.500 in
Width	1/4"
Land Diameter (L ₁)	6.186 in
Land Diameter (L ₂)	6.314 in
Approximate Weight	0.28 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	4-Point Contact (Type X)
Seals, Shields	Buna N Rubber Seal
Unit System	Inch

Load Capacities


Static Radial Load	1,900 lbf
Dynamic Radial Load	955 lbf
Static Thrust Load	4,740 lbf
Dynamic Thrust Load	1,570 lbf
Static Moment Load	5,930 in-lbs
Dynamic Moment Load	2,240 in-lbs
Torque Max No Load	52 in-lbs

Interchange

Silverthin	JSA060XPO	Kaydon	JA060XPO	Kaydon	JA060XPO	INA	CSXA0602RS
SKF	FPXA6002RS1	FAG	L18QA6002RSD	NSK	NBX15206DD	NTN	KXA152LL
SSB	RJA060XPO						

Brass; snapover separator

1/8" balls

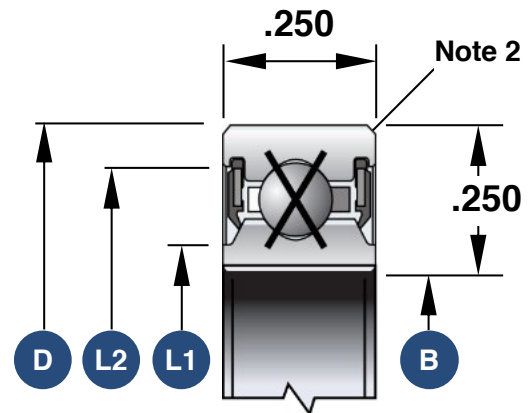

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.025"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SA060AR0
Open Radial Contact	SA060CP0
Open 4-Point Contact	SA060XPO
Sealed Radial Contact	JSA060CP0
Open Duplexed (Back-to-Back)	SA060BR0
Open Duplexed (Face-to-Face)	SA060FR0