

SILVERTHIN JSA065XPO**6.5 in Sealed Type X Thin Section Bearing****Specifications**

Bore (B)	6.500 in
Outside Diameter (D)	7.000 in
Width	1/4"
Land Diameter (L ₁)	6.686 in
Land Diameter (L ₂)	6.814 in
Approximate Weight	0.30 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	4-Point Contact (Type X)
Seals, Shields	Buna N Rubber Seal
Unit System	Inch

Load Capacities


Static Radial Load	2,050 lbf
Dynamic Radial Load	1,000 lbf
Static Thrust Load	5,120 lbf
Dynamic Thrust Load	1,650 lbf
Static Moment Load	6,910 in-lbs
Dynamic Moment Load	2,535 in-lbs
Torque Max No Load	61 in-lbs

Interchange

Silverthin	JSA065XPO	Kaydon	JA065XPO	Kaydon	JA065XPO	INA	CSXA0652RS
SKF	FPXA6082RS1	FAG	L18QA6082RSD	NSK	NBX16506DD	NTN	KXA165LL
SSB	RJA065XPO						

Brass; snapover separator

1/8" balls

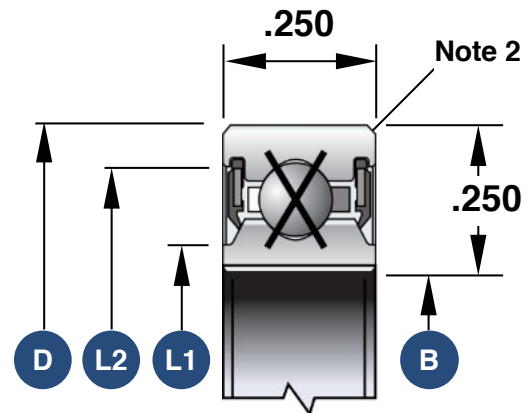

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.025"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SA065ARO
Open Radial Contact	SA065CPO
Open 4-Point Contact	SA065XPO
Sealed Radial Contact	JSA065CPO
Open Duplexed (Back-to-Back)	SA065BRO
Open Duplexed (Face-to-Face)	SA065FRO