

SILVERTHIN JSB040XP0**4 in Sealed Type X Thin Section Bearing****Specifications**

Bore (B)	4.000 in
Outside Diameter (D)	4.625 in
Width	5/16"
Land Diameter (L ₁)	4.231 in
Land Diameter (L ₂)	4.393 in
Approximate Weight	0.30 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	4-Point Contact (Type X)
Seals, Shields	Buna N Rubber Seal
Unit System	Inch

Load Capacities


Static Radial Load	1,750 lbf
Dynamic Radial Load	1,090 lbf
Static Thrust Load	4,370 lbf
Dynamic Thrust Load	1,720 lbf
Static Moment Load	3,770 in-lbs
Dynamic Moment Load	1,765 in-lbs
Torque Max No Load	20 in-lbs

Interchange

Silverthin	JSB040XP0	Kaydon	JB040XP0	Kaydon	JB040XP0	INA	CSXB0402RS
SKF	FPXB4002RS1	FAG	L18RA4002RSD	NSK	NBX10107DD	NTN	KXB101LL
SSB	RJB040XP0						

Brass; snapover separator

5/32" balls

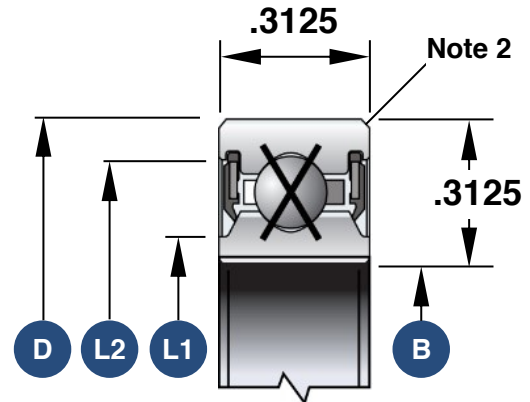

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.040"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SB040AR0
Open Radial Contact	SB040CP0
Open 4-Point Contact	SB040XP0
Sealed Radial Contact	JSB040CP0
Open Duplexed (Back-to-Back)	SB040BR0
Open Duplexed (Face-to-Face)	SB040FR0