

SILVERTHIN JSB047CP0**4.75 in Sealed Type C Thin Section Bearing****Specifications**

Bore (B)	4.750 in
Outside Diameter (D)	5.375 in
Width	5/16"
Land Diameter (L ₁)	4.981 in
Land Diameter (L ₂)	5.143 in
Approximate Weight	0.34 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	Buna N Rubber Seal
Unit System	Inch

Load Capacities


Static Radial Load	2,030 lbf
Dynamic Radial Load	900 lbf
Torque Max No Load	32 in-lbs

Interchange

Silverthin	JSB047CP0	Kaydon	JB047CP0	Kaydon	JB047CP0	INA	CSCB0472RS
SKF	FPCB4122RS1	FAG	L10RA4122RSD	NSK	NBC12007DD	NTN	KRB120LL
SSB	RJB047CP0						

Brass; snapover separator

5/32" balls

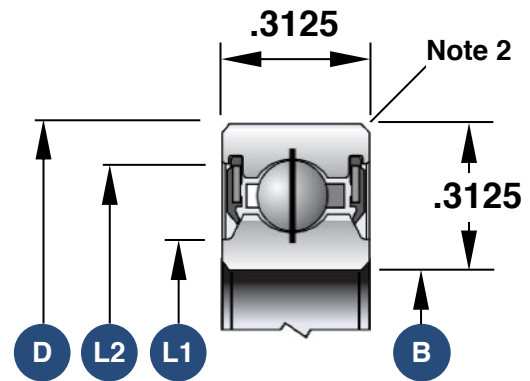

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.040"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SB047AR0
Open Radial Contact	SB047CP0
Open 4-Point Contact	SB047XP0
Sealed 4-Point Contact	JSB047XP0
Open Duplexed (Back-to-Back)	SB047BR0
Open Duplexed (Face-to-Face)	SB047FR0