

SILVERTHIN JSB060CP0**6 in Sealed Type C Thin Section Bearing****Specifications**

Bore (B)	6.000 in
Outside Diameter (D)	6.625 in
Width	5/16"
Land Diameter (L ₁)	6.231 in
Land Diameter (L ₂)	6.393 in
Approximate Weight	0.44 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	Buna N Rubber Seal
Unit System	Inch

Load Capacities


Static Radial Load	2,560 lbf
Dynamic Radial Load	1,035 lbf
Torque Max No Load	52 in-lbs

Interchange

Silverthin	JSB060CP0	Kaydon	JB060CP0	Kaydon	JB060CP0	INA	CSCB0602RS
SKF	FPCB6002RS1	FAG	L10RA6002RSD	NSK	NBC15207DD	NTN	KRB152LL
SSB	RJB060CP0						

Brass; snapover separator

5/32" balls

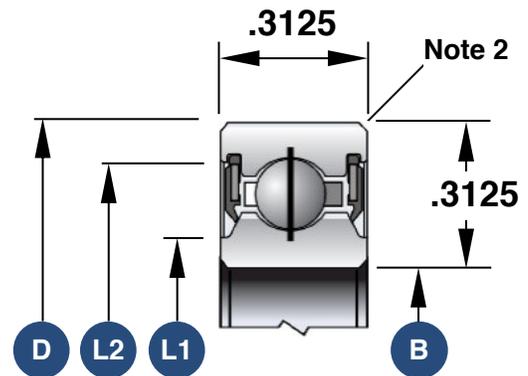

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.040"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SB060AR0
Open Radial Contact	SB060CP0
Open 4-Point Contact	SB060XP0
Sealed 4-Point Contact	JSB060XP0
Open Duplexed (Back-to-Back)	SB060BR0
Open Duplexed (Face-to-Face)	SB060FR0