

**SILVERTHIN JSB060XP0****6 in Sealed Type X Thin Section Bearing****Specifications**

Bore (B)	6.000 in
Outside Diameter (D)	6.625 in
Width	5/16"
Land Diameter (L <sub>1</sub> )	6.231 in
Land Diameter (L <sub>2</sub> )	6.393 in
Approximate Weight	0.44 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	4-Point Contact (Type X)
Seals, Shields	Buna N Rubber Seal
Unit System	Inch

**Load Capacities**


Static Radial Load	2,560 lbf
Dynamic Radial Load	1,370 lbf
Static Thrust Load	6,400 lbf
Dynamic Thrust Load	2,220 lbf
Static Moment Load	8,080 in-lbs
Dynamic Moment Load	3,245 in-lbs
Torque Max No Load	52 in-lbs

**Interchange**

Silverthin	<b>JSB060XP0</b>	Kaydon	<b>JB060XP0</b>	Kaydon	<b>JB060XP0</b>	INA	<b>CSXB0602RS</b>
SKF	<b>FPXB6002RS1</b>	FAG	<b>L18RA6002RSD</b>	NSK	<b>NBX15207DD</b>	NTN	<b>KXB152LL</b>
SSB	<b>RJB060XP0</b>						

**Brass; snapover separator**

5/32" balls

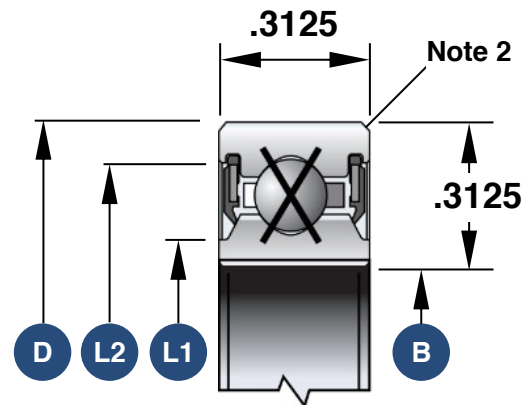

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.040"
3. Race Width Tolerance: +0.000 -0.005"

**Also Available**

Open Angular Contact	<b>SB060AR0</b>
Open Radial Contact	<b>SB060CP0</b>
Open 4-Point Contact	<b>SB060XP0</b>
Sealed Radial Contact	<b>JSB060CP0</b>
Open Duplexed (Back-to-Back)	<b>SB060BR0</b>
Open Duplexed (Face-to-Face)	<b>SB060FR0</b>