

SILVERTHIN JSB065XP0**6.5 in Sealed Type X Thin Section Bearing****Specifications**

Bore (B)	6.500 in
Outside Diameter (D)	7.125 in
Width	5/16"
Land Diameter (L ₁)	6.731 in
Land Diameter (L ₂)	6.893 in
Approximate Weight	0.47 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	4-Point Contact (Type X)
Seals, Shields	Buna N Rubber Seal
Unit System	Inch

Load Capacities


Static Radial Load	2,760 lbf
Dynamic Radial Load	1,435 lbf
Static Thrust Load	6,910 lbf
Dynamic Thrust Load	2,340 lbf
Static Moment Load	9,410 in-lbs
Dynamic Moment Load	3,670 in-lbs
Torque Max No Load	61 in-lbs

Interchange

Silverthin	JSB065XP0	Kaydon	JB065XP0	Kaydon	JB065XP0	INA	CSXB0652RS
SKF	FPXB6082RS1	FAG	L18RA6082RSD	NSK	NBX16507DD	NTN	KXB165LL
SSB	RJB065XP0						

Brass; snapover separator

5/32" balls

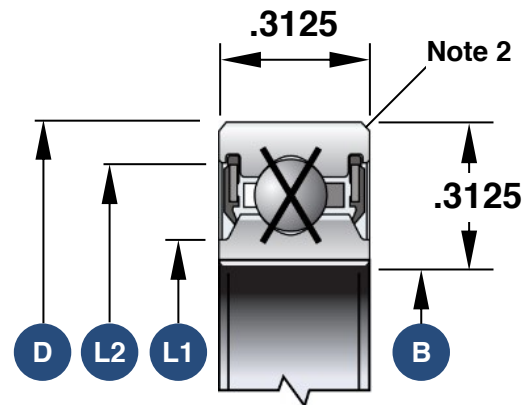

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.040"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SB065AR0
Open Radial Contact	SB065CP0
Open 4-Point Contact	SB065XP0
Sealed Radial Contact	JSB065CP0
Open Duplexed (Back-to-Back)	SB065BR0
Open Duplexed (Face-to-Face)	SB065FR0