

SILVERTHIN JSU075XP0**7.5 in Sealed Type X Thin Section Bearing****Specifications**

Bore (B)	7.500 in
Outside Diameter (D)	8.250 in
Width	1/2"
Land Diameter (L ₁)	7.777 in
Land Diameter (L ₂)	7.973 in
Approximate Weight	0.99 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	4-Point Contact (Type X)
Seals, Shields	Buna N Rubber Seal
Unit System	Inch

Load Capacities


Static Radial Load	3,790 lbf
Dynamic Radial Load	2,005 lbf
Static Thrust Load	9,470 lbf
Dynamic Thrust Load	3,270 lbf
Static Moment Load	14,910 in-lbs
Dynamic Moment Load	5,930 in-lbs
Torque Max No Load	9 in-lbs

Interchange

Silverthin	JSU075XP0	Kaydon	JU075XP0	Kaydon	JU075XP0	INA	CSXU0752RS
SKF	FPXU7082RS1	FAG	L18SG7082RSD	NSK	NBX19012DD	NTN	KXJ075LL
SSB	RJU075XP0	RBC	JU075XP0*RBC				

Brass; snapover separator

3/16" balls

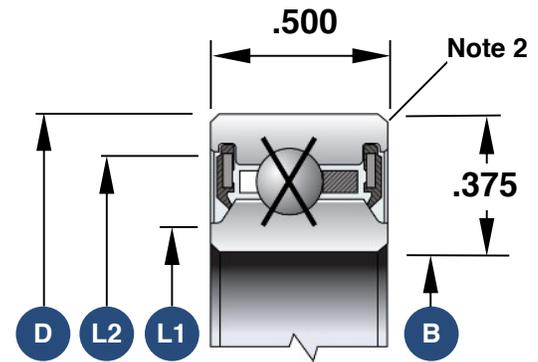

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.040"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SC075AR0
Open Radial Contact	SC075CP0
Open 4-Point Contact	SC075XP0
Sealed Radial Contact	JSU075CP0
Open Duplexed (Back-to-Back)	SC075BR0
Open Duplexed (Face-to-Face)	SC075FR0