

SILVERTHIN JSU110CP0**11 in Sealed Type C Thin Section Bearing****Specifications**

Bore (B)	11.000 in
Outside Diameter (D)	11.750 in
Width	1/2"
Land Diameter (L ₁)	11.277 in
Land Diameter (L ₂)	11.473 in
Approximate Weight	1.43 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	Buna N Rubber Seal
Unit System	Inch

Load Capacities


Static Radial Load	5,470 lbf
Dynamic Radial Load	1,880 lbf
Torque Max No Load	19 in-lbs

Interchange

Silverthin	JSU110CP0	Kaydon	JU110CP0	Kaydon	JU110CP0	INA	CSCU1102RS
SKF	FPCU11002RS1	FAG	L10SG11002RSD	NSK	NBC27912DD	NTN	KRJ110LL
SSB	RJU110CP0	RBC	JU110CP0*RBC				

Brass; snapover separator

3/16" balls

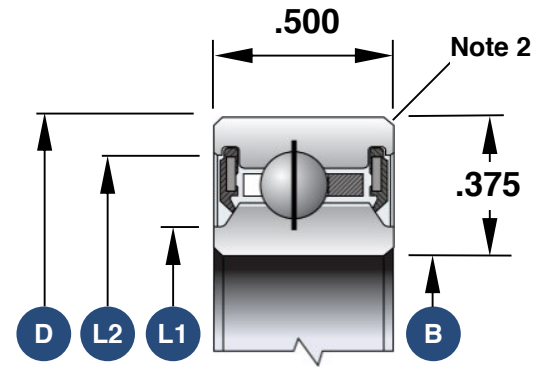

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.040"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SC110AR0
Open Radial Contact	SC110CP0
Open 4-Point Contact	SC110XP0
Sealed 4-Point Contact	JSU110XP0
Open Duplexed (Back-to-Back)	SC110BR0
Open Duplexed (Face-to-Face)	SC110FR0