

SILVERTHIN SA040CPO**4 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	4.000 in
Outside Diameter (D)	4.500 in
Width	1/4"
Land Diameter (L ₁)	4.186 in
Land Diameter (L ₂)	4.314 in
Approximate Weight	0.19 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	1,290 lbf
Dynamic Radial Load	570 lbf

Interchange

Silverthin	SA040CPO	Kaydon	KA040CPO	Kaydon	KA040CPO	INA	CSCA040
SKF	FPCA400	FAG	L10QA400	NSK	NBC10106	NTN	KRA040
SSB	RA040CPO	RBC	KA040CPO*RBC				

Brass; snapover separator

1/8" balls

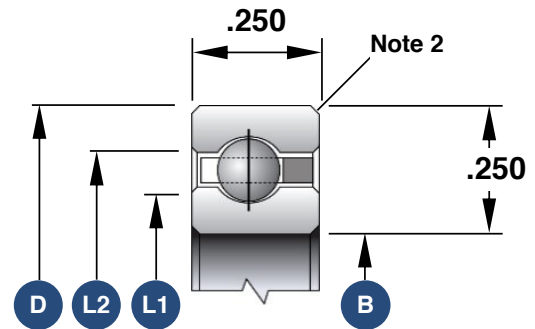

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.025"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SA040ARO
Open 4-Point Contact	SA040XPO
Sealed Radial Contact	JSA040CPO
Sealed 4-Point Contact	JSA040XPO
Open Duplexed (Back-to-Back)	SA040BRO
Open Duplexed (Face-to-Face)	SA040FRO