

SILVERTHIN SAA15XL0**1.5 in Open Type X Thin Section Bearing****Specifications**

Bore (B)	1.500 in
Outside Diameter (D)	1.875 in
Width	3/16"
Land Diameter (L ₁)	1.640 in
Land Diameter (L ₂)	1.735 in
Approximate Weight	0.04 lbs
Separator	Nylon; one piece snapover separator
Precision Class	ABEC Class 1
Bearing Type	4-Point Contact (Type X)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	400 lbf
Dynamic Radial Load	295 lbf
Static Thrust Load	1,000 lbf
Dynamic Thrust Load	460 lbf
Static Moment Load	340 in-lbs
Dynamic Moment Load	185 in-lbs

Interchange

Silverthin	SAA15XL0	Kaydon	KAA15XL0	Kaydon	KAA15XL0	INA	CSXAA015
SKF	FPXB108	FAG	L18PA108	NSK	NBX3804	NTN	KXS015
SSB	RAA15XL0	RBC	KAA15XL0*RBC				

Nylon; one piece snapover separator

3/32" balls

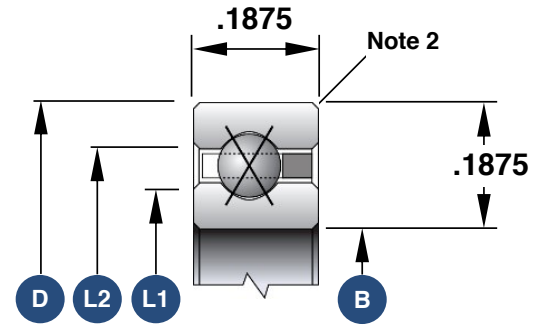

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.015"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SAA15AG0
Open Radial Contact	SAA15CL0
Sealed Radial Contact ¹	JSHA15CL0
Sealed 4-Point Contact ¹	JSHA15XL0
Open Duplexed (Back-to-Back)	SAA15BG0
Open Duplexed (Face-to-Face)	SAA15FG0

1. Larger width than SAA to accommodate a seal