

**SILVERTHIN SAA17CLO****1.75 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	1.750 in
Outside Diameter (D)	2.125 in
Width	3/16"
Land Diameter (L <sub>1</sub> )	1.890 in
Land Diameter (L <sub>2</sub> )	1.985 in
Approximate Weight	0.04 lbs
Separator	Nylon; one piece snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

**Load Capacities**


Static Radial Load	460 lbf
Dynamic Radial Load	240 lbf

**Interchange**

Silverthin	<a href="#">SAA17CLO</a>	Kaydon	<a href="#">KAA17CLO</a>	Kaydon	<a href="#">KAA17CLO</a>	INA	<a href="#">CSCAA017</a>
SKF	<a href="#">FPCB112</a>	FAG	<a href="#">L10PA112</a>	NSK	<a href="#">NBC4404</a>	NTN	<a href="#">KRS017</a>
SSB	<a href="#">RAA17CLO</a>	RBC	<a href="#">KAA17CLO*RBC</a>				

**Nylon; one piece snapover separator**

3/32" balls

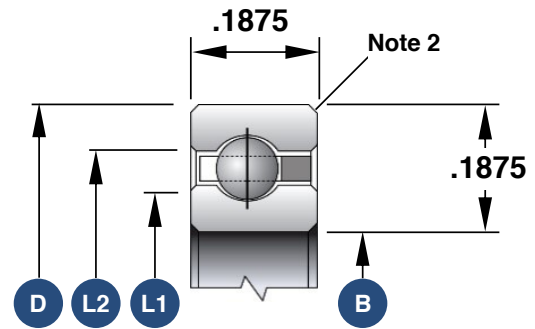

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.015"
3. Race Width Tolerance: +0.000 -0.005"

**Also Available**

Open Angular Contact	<a href="#">SAA17AG0</a>
Open 4-Point Contact	<a href="#">SAA17XL0</a>
Sealed Radial Contact <sup>1</sup>	<a href="#">JSHA17CLO</a>
Sealed 4-Point Contact <sup>1</sup>	<a href="#">JSHA17XL0</a>
Open Duplexed (Back-to-Back)	<a href="#">SAA17BG0</a>
Open Duplexed (Face-to-Face)	<a href="#">SAA17FG0</a>

1. Larger width than SAA to accommodate a seal