

SILVERTHIN SC040CP0**4 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	4.000 in
Outside Diameter (D)	4.750 in
Width	3/8"
Land Diameter (L ₁)	4.277 in
Land Diameter (L ₂)	4.473 in
Approximate Weight	0.16 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	2,100 lbf
Dynamic Radial Load	1,075 lbf

Interchange

Silverthin	SC040CP0	Kaydon	KC040CP0	Kaydon	KC040CP0	INA	CSCC040
SKF	FPCC400	FAG	L10SA400	NSK	NBC10109	NTN	KRC040
SSB	RC040CP0	RBC	KC040CP0*RBC				

Brass; snapover separator

3/16" balls

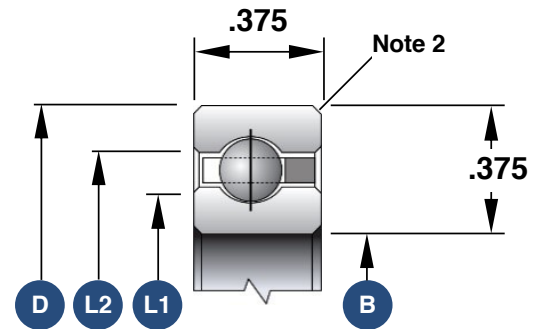

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.040"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SC040AR0
Open 4-Point Contact	SC040XP0
Sealed Radial Contact	JSU040CP0
Sealed 4-Point Contact	JSU040XP0
Open Duplexed (Back-to-Back)	SC040BR0
Open Duplexed (Face-to-Face)	SC040FR0