

SILVERTHIN SC047CP0**4.75 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	4.750 in
Outside Diameter (D)	5.500 in
Width	3/8"
Land Diameter (L ₁)	5.027 in
Land Diameter (L ₂)	5.223 in
Approximate Weight	0.47 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	2,461 lbf
Dynamic Radial Load	1,175 lbf

Interchange

Silverthin	SC047CP0	Kaydon	KC047CP0	Kaydon	KC047CP0	INA	CSCC047
SKF	FPCC412	FAG	L10SA412	NSK	NBC12009	NTN	KRC047
SSB	RC047CP0	RBC	KC047CP0*RBC				

Brass; snapover separator

3/16" balls

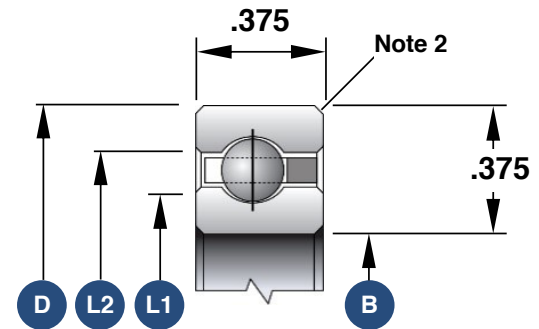

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.040"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SC047AR0
Open 4-Point Contact	SC047XP0
Sealed Radial Contact	JSU047CP0
Sealed 4-Point Contact	JSU047XP0
Open Duplexed (Back-to-Back)	SC047BR0
Open Duplexed (Face-to-Face)	SC047FR0