

SILVERTHIN SC110AR0**11 in Open Type A Thin Section Bearing****Specifications**

Bore (B)	11.000 in
Outside Diameter (D)	11.750 in
Width	3/8"
Land Diameter (L ₁)	11.277 in
Land Diameter (L ₂)	11.473 in
Land Diameter (L ₃)	11.542 in
Approximate Weight	1.16 lbs
Separator	Brass; one piece pocket separator
Precision Class	ABEC Class 1
Bearing Type	Angular Contact (Type A)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	6,720 lbf
Dynamic Radial Load	2,045 lbf
Static Thrust Load	19,390 lbf
Dynamic Thrust Load	5,280 lbf

Interchange

Silverthin	SC110AR0	Kaydon	KC110AR0	Kaydon	KC110AR0	INA	CSEC110
SKF	FPAC1100	FAG	L15SA1100	NSK	NBA27909	NTN	KYC110
SSB	RC110AR0	RBC	KC110AR0*RBC				

Brass; one piece pocket separator

3/16" balls

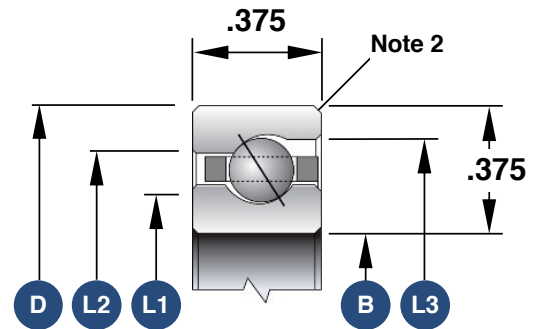

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.040"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Radial Contact	SC110CP0
Open 4-Point Contact	SC110XP0
Sealed Radial Contact	JSU110CP0
Sealed 4-Point Contact	JSU110XP0
Open Duplexed (Back-to-Back)	SC110BR0
Open Duplexed (Face-to-Face)	SC110FR0