

SILVERTHIN SC110CP0**11 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	11.000 in
Outside Diameter (D)	11.750 in
Width	3/8"
Land Diameter (L ₁)	11.277 in
Land Diameter (L ₂)	11.473 in
Approximate Weight	0.94 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	5,470 lbf
Dynamic Radial Load	1,880 lbf

Interchange

Silverthin	SC110CP0	Kaydon	KC110CP0	Kaydon	KC110CP0	INA	CSCC110
SKF	FPCC1100	FAG	L10SA1100	NSK	NBC27909	NTN	KRC110
SSB	RC110CP0	RBC	KC110CP0*RBC				

Brass; snapover separator

3/16" balls

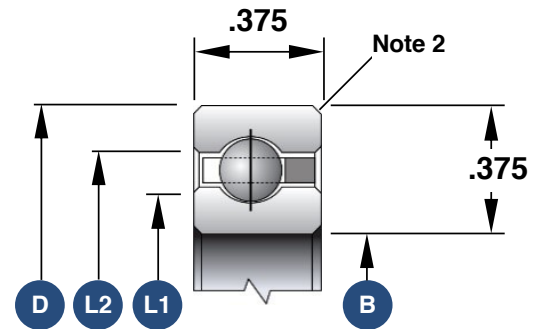

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.040"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SC110AR0
Open 4-Point Contact	SC110XP0
Sealed Radial Contact	JSU110CP0
Sealed 4-Point Contact	JSU110XP0
Open Duplexed (Back-to-Back)	SC110BR0
Open Duplexed (Face-to-Face)	SC110FR0