

SILVERTHIN SC160CP0**16 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	16.000 in
Outside Diameter (D)	16.750 in
Width	3/8"
Land Diameter (L ₁)	16.277 in
Land Diameter (L ₂)	16.473 in
Approximate Weight	1.25 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	7,880 lbf
Dynamic Radial Load	2,320 lbf

Interchange

Silverthin	SC160CP0	Kaydon	KC160CP0	Kaydon	KC160CP0	INA	CSCC160
SKF	FPCC1600	FAG	L10SA1400	NSK	NBC40609	NTN	KRC160
SSB	RC160CP0	RBC	KC160CP0*RBC				

Brass; snapover separator

3/16" balls

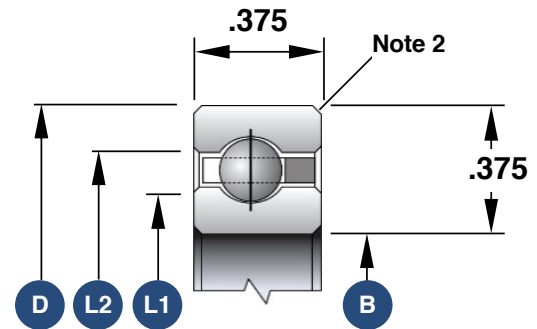

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.040"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SC160AR0
Open 4-Point Contact	SC160XP0
Open Duplexed (Back-to-Back)	SC160BR0
Open Duplexed (Face-to-Face)	SC160FR0