

SILVERTHIN SC200AR0**20 in Open Type A Thin Section Bearing****Specifications**

Bore (B)	20.000 in
Outside Diameter (D)	20.750 in
Width	3/8"
Land Diameter (L ₁)	20.277 in
Land Diameter (L ₂)	20.473 in
Land Diameter (L ₃)	20.517 in
Approximate Weight	2.16 lbs
Separator	Brass; one piece pocket separator
Precision Class	ABEC Class 1
Bearing Type	Angular Contact (Type A)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	12,030 lbf
Dynamic Radial Load	2,865 lbf
Static Thrust Load	34,720 lbf
Dynamic Thrust Load	7,780 lbf

Interchange

Silverthin	SC200AR0	Kaydon	KC200AR0
SKF	FPAC2000	FAG	L15SA2000
SSB	RC200AR0	RBC	KC200AR0*RBC

Brass; one piece pocket separator

3/16" balls

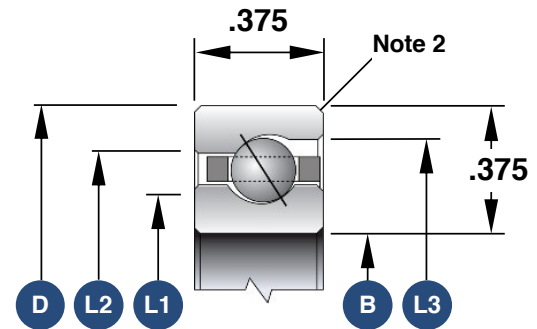

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.040"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Radial Contact	SC200CP0
Open 4-Point Contact	SC200XP0
Open Duplexed (Back-to-Back)	SC200BR0
Open Duplexed (Face-to-Face)	SC200FR0