

**SILVERTHIN SF040CP0****4 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	4.000 in
Outside Diameter (D)	5.500 in
Width	3/4"
Land Diameter (L <sub>1</sub> )	4.555 in
Land Diameter (L <sub>2</sub> )	4.945 in
Approximate Weight	1.90 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

**Load Capacities**


Static Radial Load	5,360 lbf
Dynamic Radial Load	3,560 lbf

**Interchange**

Silverthin	SF040CP0	Kaydon	KF040CP0	Kaydon	KF040CP0	INA	CSCF040
SKF	FPCF400	FAG	L10VA400	NSK	NBC10119	NTN	KRF040
SSB	RF040CP0	RBC	KF040CP0*RBC				

**Brass; snapover separator**

3/8" balls

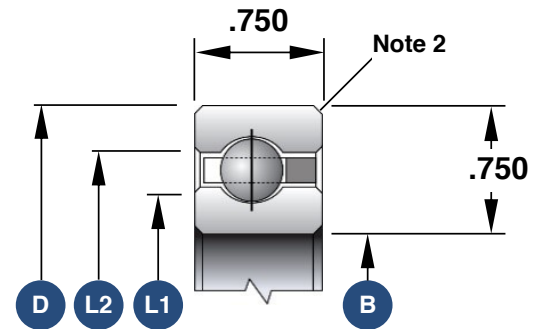

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

**Also Available**

Open Angular Contact	SF040ARO
Open 4-Point Contact	SF040XPO
Open Duplexed (Back-to-Back)	SF040BRO
Open Duplexed (Face-to-Face)	SF040FRO