

SILVERTHIN SF045CP0**4.5 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	4.500 in
Outside Diameter (D)	6.000 in
Width	3/4"
Land Diameter (L ₁)	5.060 in
Land Diameter (L ₂)	5.445 in
Approximate Weight	2.10 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	5,930 lbf
Dynamic Radial Load	3,750 lbf

Interchange

Silverthin	SF045CP0	Kaydon	KF045CP0	Kaydon	KF045CP0	INA	CSCF045
SKF	FPCF408	FAG	L10VA408	NSK	NBC11419	NTN	KRF045
SSB	RF045CP0	RBC	KF045CP0*RBC				

Brass; snapover separator

3/8" balls

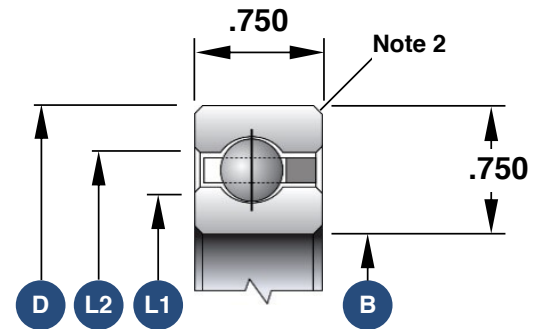

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SF045AR0
Open 4-Point Contact	SF045XP0
Open Duplexed (Back-to-Back)	SF045BR0
Open Duplexed (Face-to-Face)	SF045FR0