

SILVERTHIN SF047AR0**4.75 in Open Type A Thin Section Bearing****Specifications**

Bore (B)	4.750 in
Outside Diameter (D)	6.250 in
Width	3/4"
Land Diameter (L ₁)	5.305 in
Land Diameter (L ₂)	5.695 in
Land Diameter (L ₃)	5.865 in
Approximate Weight	2.20 lbs
Separator	Brass; one piece pocket separator
Precision Class	ABEC Class 1
Bearing Type	Angular Contact (Type A)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	7,330 lbf
Dynamic Radial Load	4,035 lbf
Static Thrust Load	21,160 lbf
Dynamic Thrust Load	9,260 lbf

Interchange

Silverthin	SF047AR0	Kaydon	KF047AR0
SKF	FPAF412	FAG	L15VA412
SSB	RF047AR0	RBC	KF047AR0*RBC

Brass; one piece pocket separator

3/8" balls

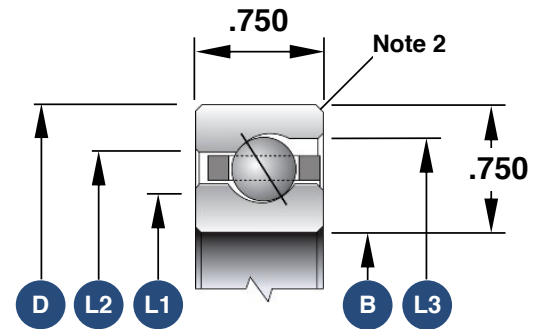

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Radial Contact	SF047CP0
Open 4-Point Contact	SF047XP0
Open Duplexed (Back-to-Back)	SF047BR0
Open Duplexed (Face-to-Face)	SF047FR0