

SILVERTHIN SF050CP0**5 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	5.000 in
Outside Diameter (D)	6.500 in
Width	3/4"
Land Diameter (L ₁)	5.555 in
Land Diameter (L ₂)	5.945 in
Approximate Weight	2.30 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	6,490 lbf
Dynamic Radial Load	3,935 lbf

Interchange

Silverthin	SF050CP0	Kaydon	KF050CP0	Kaydon	KF050CP0	INA	CSCF050
SKF	FPCF500	FAG	L10VA500	NSK	NBC12719	NTN	KRF050
SSB	RF050CP0	RBC	KF050CP0*RBC				

Brass; snapover separator

3/8" balls

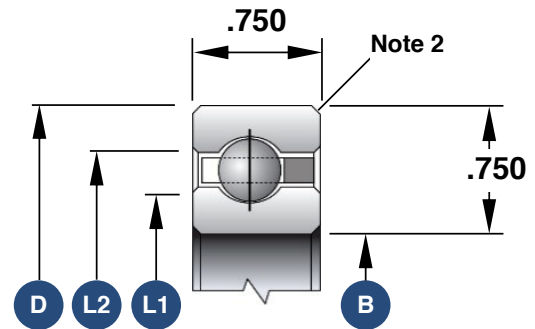

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SF050ARO
Open 4-Point Contact	SF050XPO
Open Duplexed (Back-to-Back)	SF050BR0
Open Duplexed (Face-to-Face)	SF050FR0