

SILVERTHIN SF055AR0**5.5 in Open Type A Thin Section Bearing****Specifications**

Bore (B)	5.500 in
Outside Diameter (D)	7.000 in
Width	3/4"
Land Diameter (L ₁)	6.055 in
Land Diameter (L ₂)	6.445 in
Land Diameter (L ₃)	6.613 in
Approximate Weight	2.50 lbs
Separator	Brass; one piece pocket separator
Precision Class	ABEC Class 1
Bearing Type	Angular Contact (Type A)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	8,310 lbf
Dynamic Radial Load	4,320 lbf
Static Thrust Load	23,980 lbf
Dynamic Thrust Load	10,060 lbf

Interchange

Silverthin	SF055AR0	Kaydon	KF055AR0
SKF	FPAF508	FAG	L15VA508
SSB	RF055AR0	RBC	KF055AR0*RBC

Brass; one piece pocket separator

3/8" balls

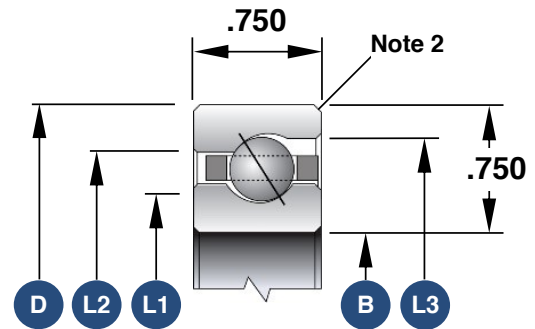

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Radial Contact	SF055CP0
Open 4-Point Contact	SF055XP0
Open Duplexed (Back-to-Back)	SF055BR0
Open Duplexed (Face-to-Face)	SF055FR0