

SILVERTHIN SF060CP0**6 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	6.000 in
Outside Diameter (D)	7.500 in
Width	3/4"
Land Diameter (L ₁)	6.555 in
Land Diameter (L ₂)	6.945 in
Approximate Weight	2.70 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	7,620 lbf
Dynamic Radial Load	4,290 lbf

Interchange

Silverthin	SF060CP0	Kaydon	KF060CP0	Kaydon	KF060CP0	INA	CSCF060
SKF	FPCF600	FAG	L10VA600	NSK	NBC15219	NTN	KRF060
SSB	RF060CP0	RBC	KF060CP0*RBC				

Brass; snapover separator

3/8" balls

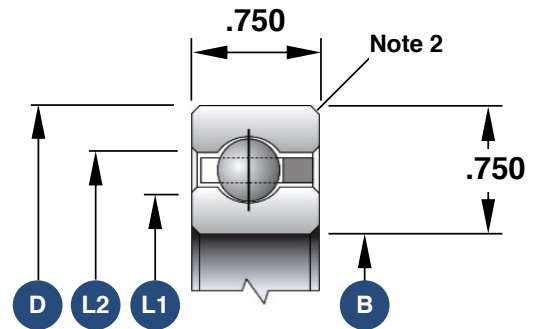

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SF060ARO
Open 4-Point Contact	SF060XPO
Open Duplexed (Back-to-Back)	SF060BR0
Open Duplexed (Face-to-Face)	SF060FR0