

SILVERTHIN SF065AR0**6.5 in Open Type A Thin Section Bearing****Specifications**

Bore (B)	6.500 in
Outside Diameter (D)	8.000 in
Width	3/4"
Land Diameter (L ₁)	7.055 in
Land Diameter (L ₂)	7.445 in
Land Diameter (L ₃)	7.613 in
Approximate Weight	2.90 lbs
Separator	Brass; one piece pocket separator
Precision Class	ABEC Class 1
Bearing Type	Angular Contact (Type A)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	9,770 lbf
Dynamic Radial Load	4,735 lbf
Static Thrust Load	28,220 lbf
Dynamic Thrust Load	11,220 lbf

Interchange

Silverthin	SF065AR0	Kaydon	KF065AR0
SKF	FPAF608	FAG	L15VA608
SSB	RF065AR0	RBC	KF065AR0*RBC

Brass; one piece pocket separator

3/8" balls

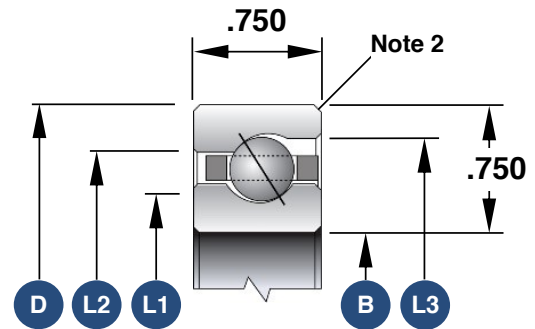

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Radial Contact	SF065CP0
Open 4-Point Contact	SF065XP0
Open Duplexed (Back-to-Back)	SF065BR0
Open Duplexed (Face-to-Face)	SF065FR0