

SILVERTHIN SF065CP0**6.5 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	6.500 in
Outside Diameter (D)	8.000 in
Width	3/4"
Land Diameter (L ₁)	7.055 in
Land Diameter (L ₂)	7.445 in
Approximate Weight	2.90 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	8,180 lbf
Dynamic Radial Load	4,460 lbf

Interchange

Silverthin	SF065CP0	Kaydon	KF065CP0	Kaydon	KF065CP0	INA	CSCF065
SKF	FPCF608	FAG	L10VA608	NSK	NBC16519	NTN	KRF065
SSB	RF065CP0	RBC	KF065CP0*RBC				

Brass; snapover separator

3/8" balls

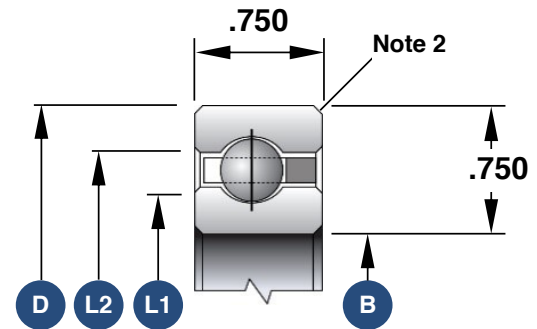

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SF065AR0
Open 4-Point Contact	SF065XP0
Open Duplexed (Back-to-Back)	SF065BR0
Open Duplexed (Face-to-Face)	SF065FR0