

SILVERTHIN SF070CP0**7 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	7.000 in
Outside Diameter (D)	8.500 in
Width	3/4"
Land Diameter (L ₁)	7.555 in
Land Diameter (L ₂)	7.945 in
Approximate Weight	3.20 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	8,750 lbf
Dynamic Radial Load	4,630 lbf

Interchange

Silverthin	SF070CP0	Kaydon	KF070CP0	Kaydon	KF070CP0	INA	CSCF070
SKF	FPCF700	FAG	L10VA700	NSK	NBC17719	NTN	KRF070
SSB	RF070CP0	RBC	KF070CP0*RBC				

Brass; snapover separator

3/8" balls

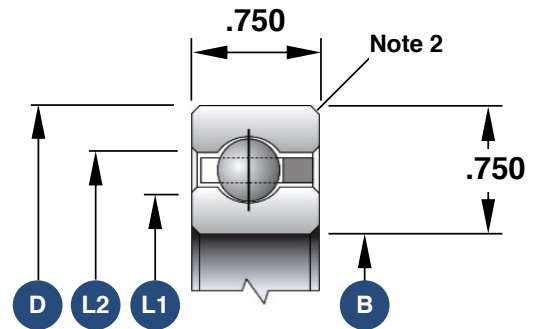

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SF070ARO
Open 4-Point Contact	SF070XPO
Open Duplexed (Back-to-Back)	SF070BR0
Open Duplexed (Face-to-Face)	SF070FR0