

SILVERTHIN SF075CP0**7.5 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	7.500 in
Outside Diameter (D)	9.000 in
Width	3/4"
Land Diameter (L ₁)	8.055 in
Land Diameter (L ₂)	8.445 in
Approximate Weight	3.40 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	9,310 lbf
Dynamic Radial Load	4,790 lbf

Interchange

Silverthin	SF075CP0	Kaydon	KF075CP0	Kaydon	KF075CP0	INA	CSCF075
SKF	FPCF708	FAG	L10VA708	NSK	NBC19019	NTN	KRF075
SSB	RF075CP0	RBC	KF075CP0*RBC				

Brass; snapover separator

3/8" balls

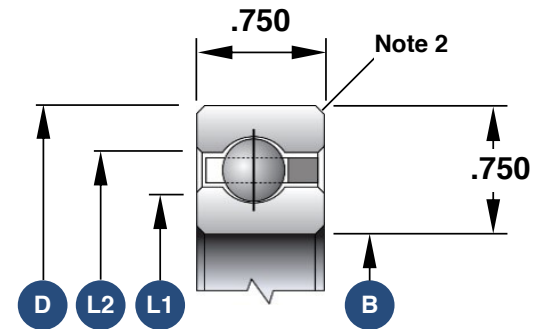

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SF075AR0
Open 4-Point Contact	SF075XP0
Open Duplexed (Back-to-Back)	SF075BR0
Open Duplexed (Face-to-Face)	SF075FR0