

SILVERTHIN SF090CP0**9 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	9.000 in
Outside Diameter (D)	10.500 in
Width	3/4"
Land Diameter (L ₁)	9.555 in
Land Diameter (L ₂)	9.945 in
Approximate Weight	3.90 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	11,000 lbf
Dynamic Radial Load	5,255 lbf

Interchange

Silverthin	SF090CP0	Kaydon	KF090CP0	Kaydon	KF090CP0	INA	CSCF090
SKF	FPCF900	FAG	L10VA900	NSK	NBC22819	NTN	KRF090
SSB	RF090CP0	RBC	KF090CP0*RBC				

Brass; snapover separator

3/8" balls

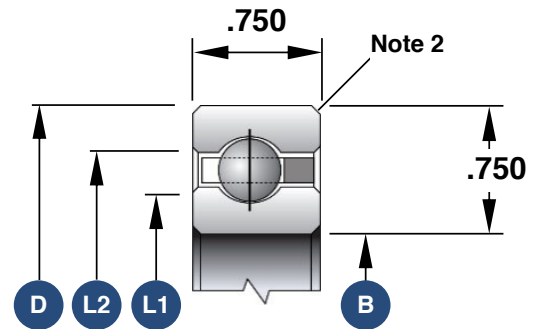

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SF090ARO
Open 4-Point Contact	SF090XPO
Open Duplexed (Back-to-Back)	SF090BRO
Open Duplexed (Face-to-Face)	SF090FRO