

SILVERTHIN SF110AR0**11 in Open Type A Thin Section Bearing****Specifications**

Bore (B)	11.000 in
Outside Diameter (D)	12.500 in
Width	3/4"
Land Diameter (L ₁)	11.555 in
Land Diameter (L ₂)	11.945 in
Land Diameter (L ₃)	12.106 in
Approximate Weight	4.80 lbs
Separator	Brass; one piece pocket separator
Precision Class	ABEC Class 1
Bearing Type	Angular Contact (Type A)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	15,880 lbf
Dynamic Radial Load	6,225 lbf
Static Thrust Load	45,850 lbf
Dynamic Thrust Load	15,500 lbf

Interchange

Silverthin	SF110AR0	Kaydon	KF110AR0
SKF	FPAF1100	FAG	L15VA1100
SSB	RF110AR0	RBC	KF110AR0*RBC

Brass; one piece pocket separator

3/8" balls

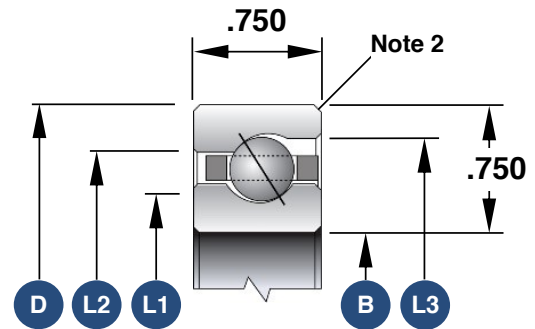

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Radial Contact	SF110CP0
Open 4-Point Contact	SF110XP0
Open Duplexed (Back-to-Back)	SF110BR0
Open Duplexed (Face-to-Face)	SF110FR0