

**SILVERTHIN SF110XPO****11 in Open Type X Thin Section Bearing****Specifications**

Bore (B)	11.000 in
Outside Diameter (D)	12.500 in
Width	3/4"
Land Diameter (L <sub>1</sub> )	11.555 in
Land Diameter (L <sub>2</sub> )	11.945 in
Approximate Weight	4.80 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	4-Point Contact (Type X)
Seals, Shields	None (Open)
Unit System	Inch

**Load Capacities**


Static Radial Load	13,260 lbf
Dynamic Radial Load	7,720 lbf
Static Thrust Load	33,150 lbf
Dynamic Thrust Load	12,490 lbf
Static Moment Load	77,910 in-lbs
Dynamic Moment Load	34,030 in-lbs

**Interchange**

Silverthin	<a href="#">SF110XPO</a>	Kaydon	<a href="#">KF110XPO</a>	Kaydon	<a href="#">KF110XPO</a>	INA	<a href="#">CSXF110</a>
SKF	<a href="#">FPXF1100</a>	FAG	<a href="#">L18VA1100</a>	NSK	<a href="#">NBX27919</a>	NTN	<a href="#">KXF110</a>
SSB	<a href="#">RF110XPO</a>	RBC	<a href="#">KF110XPO*RBC</a>				

**Brass; snapover separator**

3/8" balls

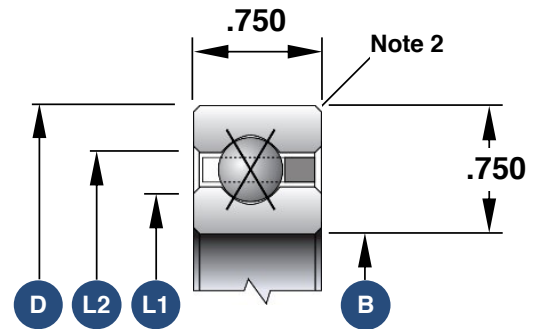

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

**Also Available**

Open Angular Contact	<a href="#">SF110ARO</a>
Open Radial Contact	<a href="#">SF110CPO</a>
Open Duplexed (Back-to-Back)	<a href="#">SF110BR0</a>
Open Duplexed (Face-to-Face)	<a href="#">SF110FR0</a>