

SILVERTHIN SF140CP0**14 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	14.000 in
Outside Diameter (D)	15.500 in
Width	3/4"
Land Diameter (L ₁)	14.555 in
Land Diameter (L ₂)	14.945 in
Approximate Weight	6.00 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	16,650 lbf
Dynamic Radial Load	6,620 lbf

Interchange

Silverthin	SF140CP0	Kaydon	KF140CP0	Kaydon	KF140CP0	INA	CSCF140
SKF	FPCF1400	FAG	L10VA1400	NSK	NBC35519	NTN	KRF140
SSB	RF140CP0	RBC	KF140CP0*RBC				

Brass; snapover separator

3/8" balls

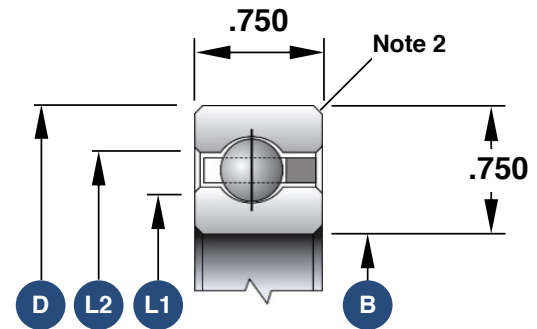

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SF140ARO
Open 4-Point Contact	SF140XPO
Open Duplexed (Back-to-Back)	SF140BRO
Open Duplexed (Face-to-Face)	SF140FRO