

SILVERTHIN SF160AR0**16 in Open Type A Thin Section Bearing****Specifications**

Bore (B)	16.000 in
Outside Diameter (D)	17.500 in
Width	3/4"
Land Diameter (L ₁)	16.555 in
Land Diameter (L ₂)	16.945 in
Land Diameter (L ₃)	17.098 in
Approximate Weight	7.10 lbs
Separator	Brass; one piece pocket separator
Precision Class	ABEC Class 1
Bearing Type	Angular Contact (Type A)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	22,480 lbf
Dynamic Radial Load	7,565 lbf
Static Thrust Load	64,890 lbf
Dynamic Thrust Load	19,540 lbf

Interchange

Silverthin	SF160AR0	Kaydon	KF160AR0
SKF	FPAF1600	FAG	L15VA1600
SSB	RF160AR0	RBC	KF160AR0*RBC

Brass; one piece pocket separator

3/8" balls

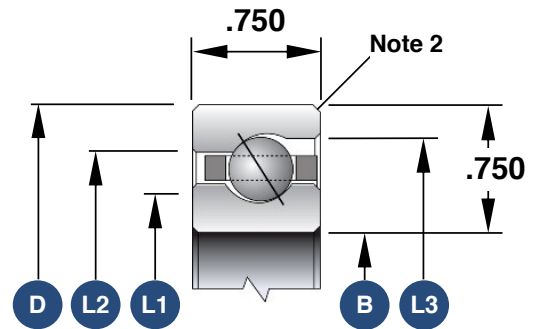

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Radial Contact	SF160CP0
Open 4-Point Contact	SF160XP0
Open Duplexed (Back-to-Back)	SF160BR0
Open Duplexed (Face-to-Face)	SF160FR0