

SILVERTHIN SF160CP0**16 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	16.000 in
Outside Diameter (D)	17.500 in
Width	3/4"
Land Diameter (L ₁)	16.555 in
Land Diameter (L ₂)	16.945 in
Approximate Weight	7.10 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	18,900 lbf
Dynamic Radial Load	7,105 lbf

Interchange

Silverthin	SF160CP0	Kaydon	KF160CP0	Kaydon	KF160CP0	INA	CSCF160
SKF	FPCF1600	FAG	L10VA1600	NSK	NBC40619	NTN	KRF160
SSB	RF160CP0	RBC	KF160CP0*RBC				

Brass; snapover separator

3/8" balls

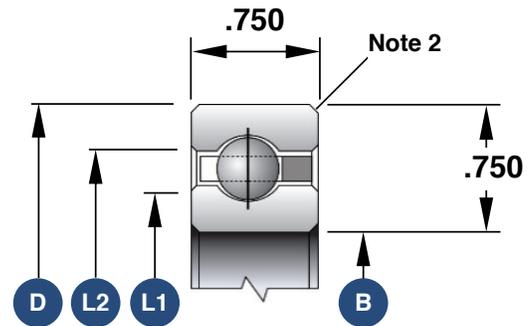

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SF160ARO
Open 4-Point Contact	SF160XPO
Open Duplexed (Back-to-Back)	SF160BR0
Open Duplexed (Face-to-Face)	SF160FR0