

SILVERTHIN SF200CP0**20 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	20.000 in
Outside Diameter (D)	21.500 in
Width	3/4"
Land Diameter (L ₁)	20.555 in
Land Diameter (L ₂)	20.945 in
Approximate Weight	8.90 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	23,420 lbf
Dynamic Radial Load	7,985 lbf

Interchange

Silverthin	SF200CP0	Kaydon	KF200CP0	Kaydon	KF200CP0	INA	CSCF200
SKF	FPCF2000	FAG	L10VA2000	NSK	NBC50819	NTN	KRF200
SSB	RF200CP0	RBC	KF200CP0*RBC				

Brass; snapover separator

3/8" balls

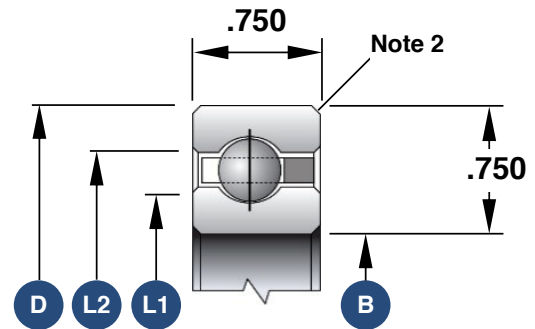

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SF200ARO
Open 4-Point Contact	SF200XPO
Open Duplexed (Back-to-Back)	SF200BRO
Open Duplexed (Face-to-Face)	SF200FRO