

SILVERTHIN SF250CP0**25 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	25.000 in
Outside Diameter (D)	26.500 in
Width	3/4"
Land Diameter (L ₁)	25.555 in
Land Diameter (L ₂)	25.945 in
Approximate Weight	10.90 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	29,060 lbf
Dynamic Radial Load	8,965 lbf

Interchange

Silverthin	SF250CP0	Kaydon	KF250CP0	Kaydon	KF250CP0	INA	CSCF250
SKF	FPCF2500	FAG	L10VA2500	NSK	NBC63519	NTN	KRF250
SSB	RF250CP0	RBC	KF250CP0*RBC				

Brass; snapover separator

3/8" balls

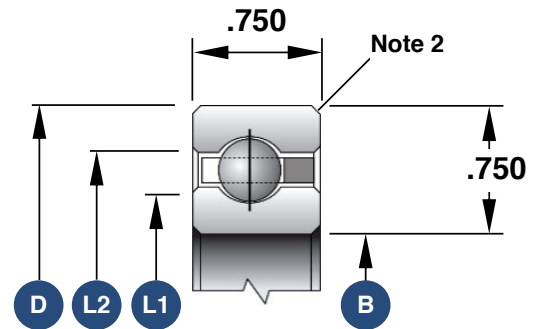

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SF250ARO
Open 4-Point Contact	SF250XPO
Open Duplexed (Back-to-Back)	SF250BR0
Open Duplexed (Face-to-Face)	SF250FR0