

SILVERTHIN SF350AR0**35 in Open Type A Thin Section Bearing****Specifications**

Bore (B)	35.000 in
Outside Diameter (D)	36.500 in
Width	3/4"
Land Diameter (L ₁)	35.555 in
Land Diameter (L ₂)	35.945 in
Land Diameter (L ₃)	36.064 in
Approximate Weight	15.10 lbs
Separator	Brass; one piece pocket separator
Precision Class	ABEC Class 1
Bearing Type	Angular Contact (Type A)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	48,380 lbf
Dynamic Radial Load	11,380 lbf
Static Thrust Load	139,700 lbf
Dynamic Thrust Load	32,580 lbf

Interchange

Silverthin	SF350AR0	Kaydon	KF350AR0
SKF	FPAF3500	FAG	L15VA3500
SSB	RF350AR0	RBC	KF350AR0*RBC

Brass; one piece pocket separator

3/8" balls

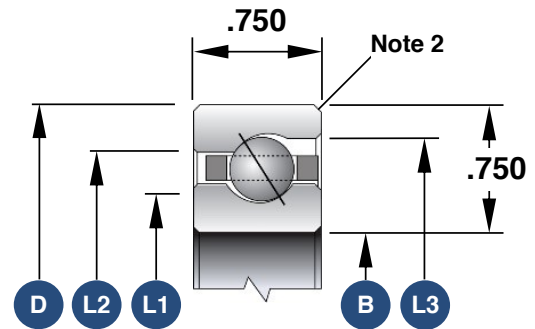

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Radial Contact	SF350CP0
Open 4-Point Contact	SF350XP0
Open Duplexed (Back-to-Back)	SF350BR0
Open Duplexed (Face-to-Face)	SF350FR0