

SILVERTHIN SF350CP0**35 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	35.000 in
Outside Diameter (D)	36.500 in
Width	3/4"
Land Diameter (L ₁)	35.555 in
Land Diameter (L ₂)	35.945 in
Approximate Weight	15.10 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	40,350 lbf
Dynamic Radial Load	10,605 lbf

Interchange

Silverthin	SF350CP0	Kaydon	KF350CP0	Kaydon	KF350CP0	INA	CSCF350
SKF	FPCF3500	FAG	L10VA3500	NSK	NBC88919	NTN	KRF350
SSB	RF350CP0	RBC	KF350CP0*RBC				

Brass; snapover separator

3/8" balls

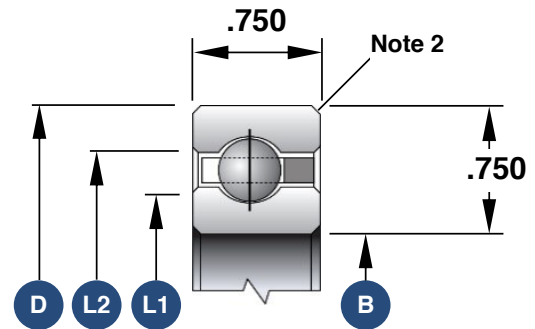

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SF350ARO
Open 4-Point Contact	SF350XPO
Open Duplexed (Back-to-Back)	SF350BR0
Open Duplexed (Face-to-Face)	SF350FR0