

SILVERTHIN SG065CP0**6.5 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	6.500 in
Outside Diameter (D)	8.500 in
Width	1"
Land Diameter (L ₁)	7.242 in
Land Diameter (L ₂)	7.758 in
Approximate Weight	5.40 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	12,040 lbf
Dynamic Radial Load	7,395 lbf

Interchange

Silverthin	SG065CP0	Kaydon	KG065CP0	Kaydon	KG065CP0	INA	CSCG065
SKF	FPCG608	FAG	L10WA608	NSK	NBC16525	NTN	KRG065
SSB	RG065CP0	RBC	KG065CP0*RBC				

Brass; snapover separator

1/2" balls

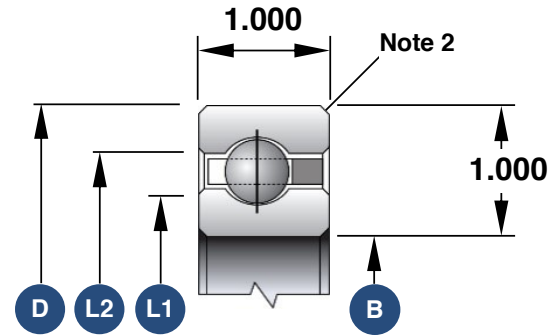

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SG065AR0
Open 4-Point Contact	SG065XP0
Open Duplexed (Back-to-Back)	SG065BR0
Open Duplexed (Face-to-Face)	SG065FR0