

SILVERTHIN SG160CP0**16 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	16.000 in
Outside Diameter (D)	18.000 in
Width	1"
Land Diameter (L ₁)	16.742 in
Land Diameter (L ₂)	17.258 in
Approximate Weight	12.30 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	27,910 lbf
Dynamic Radial Load	11,650 lbf

Interchange

Silverthin	SG160CP0	Kaydon	KG160CP0	Kaydon	KG160CP0	INA	CSCG160
SKF	FPCG1600	FAG	L10WA1600	NSK	NBC40625	NTN	KRG160
SSB	RG160CP0	RBC	KG160CP0*RBC				

Brass; snapover separator

1/2" balls

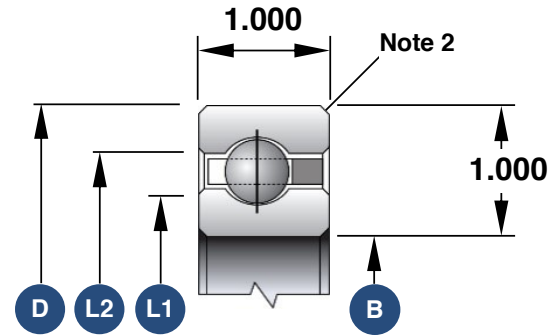

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SG160AR0
Open 4-Point Contact	SG160XP0
Open Duplexed (Back-to-Back)	SG160BR0
Open Duplexed (Face-to-Face)	SG160FR0