

SILVERTHIN SG200CP0**20 in Open Type C Thin Section Bearing****Specifications**

Bore (B)	20.000 in
Outside Diameter (D)	22.000 in
Width	1"
Land Diameter (L ₁)	20.742 in
Land Diameter (L ₂)	21.258 in
Approximate Weight	15.80 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Inch

Load Capacities


Static Radial Load	34,470 lbf
Dynamic Radial Load	13,045 lbf

Interchange

Silverthin	SG200CP0	Kaydon	KG200CP0	Kaydon	KG200CP0	INA	CSCG200
SKF	FPCG2000	FAG	L10WA2000	NSK	NBC50825	NTN	KRG200
SSB	RG200CP0	RBC	KG200CP0*RBC				

Brass; snapover separator

1/2" balls

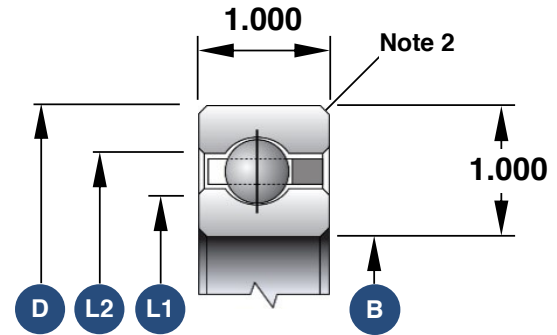

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.080"
3. Race Width Tolerance: +0.000 -0.005"

Also Available

Open Angular Contact	SG200AR0
Open 4-Point Contact	SG200XP0
Open Duplexed (Back-to-Back)	SG200BR0
Open Duplexed (Face-to-Face)	SG200FR0