


SILVERTHINSK6-25PZ

No Gear Slewing Ring Bearing

Overall Dimensions

| | |
|---|-----------|
| Outside diameter of outer ring (D_o) | 29.450 in |
| Internal diameter on outer ring (D_i) | 25.280 in |
| External diameter on outer ring (D_r) | 26.930 in |
| Inside diameter of inner ring (d_i) | 21.030 in |
| Internal diameter on inner ring (d_r) | 23.550 in |
| External diameter on inner ring (d_o) | 25.200 in |
| Approximate Weight | 89.00 lbs |

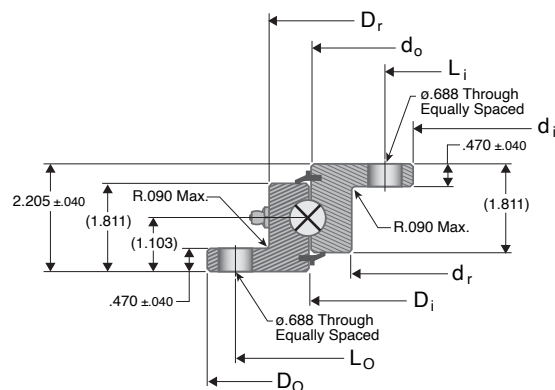

Mounting Holes

| | |
|----------------------------------|-----------|
| Inner Ring Bolt Circle (L_i) | 22.130 in |
| Inner Ring Hole Count | 18 |
| Outer Ring Bolt Circle (L_o) | 28.380 in |
| Outer Ring Hole Count | 12 |

Also Available

| | |
|---------------------------|-----------|
| 14 SD Tooth Mating Pinion | SP1629-14 |
| 17 SD Tooth Mating Pinion | SP1629-17 |

Interchange

| | | | |
|-------|--------------|---------------|-----------|
| Rotek | L6-25P9ZAvon | 725 MC1Kaydon | RK6-25P1Z |
|-------|--------------|---------------|-----------|

Load Capacities

| | |
|---------------|---------------|
| Moment Rating | 50,150 ft-lbs |
|---------------|---------------|

866.294.5841 425.222.7535 sales@silverthin.com

8152 - 304th Ave. S.E. PO Box 5012 Preston, WA 98050-5012 USA

Copyright © 2024 All rights reserved by Silverthin