

# SILVERTHIN SM16013CP0 160 mm Open Type C Thin Section Bearing

## Specifications

Bore (B)	160.000 mm
Outside Diameter (D)	186.000 mm
Width	13mm
Land Diameter (L <sub>1</sub> )	169.700 mm
Land Diameter (L <sub>2</sub> )	176.300 mm
Approximate Weight	0.49 kg
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	None (Open)
Unit System	Metric

## Load Capacities


Static Radial Load	25,355 n
Dynamic Radial Load	12,145 n

## Interchange

Silverthin [SM16013CP0](#) Kaydon [K16013CP0](#) Kaydon [K16013CPO](#)

## Brass; snapover separator

1/4" balls

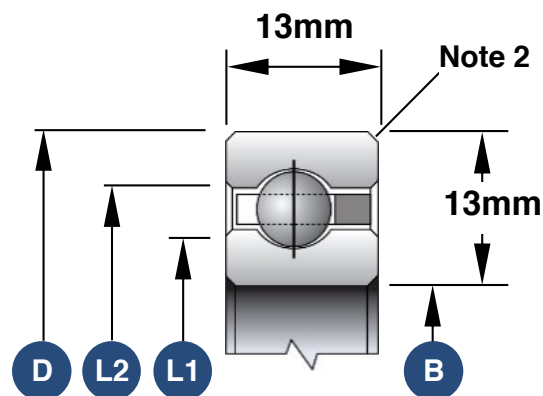

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 1.5mm
3. Race Width Tolerance: +0.000 -0.127mm

## Also Available

Open Angular Contact	<a href="#">SM16013AR0</a>
Open 4-Point Contact	<a href="#">SM16013XP0</a>
Open Duplexed (Back-to-Back)	<a href="#">SM16013BR0</a>
Open Duplexed (Face-to-Face)	<a href="#">SM16013FR0</a>