

# SILVERTHIN SM17008XPO 170 mm Open Type X Thin Section Bearing

## Specifications

Bore (B)	170.000 mm
Outside Diameter (D)	186.000 mm
Width	8mm
Land Diameter (L <sub>1</sub> )	175.900 mm
Land Diameter (L <sub>2</sub> )	180.100 mm
Approximate Weight	0.21 kg
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	4-Point Contact (Type X)
Seals, Shields	None (Open)
Unit System	Metric

## Load Capacities


Static Radial Load	17,325 n
Dynamic Radial Load	8,920 n
Static Thrust Load	43,325 n
Dynamic Thrust Load	14,120 n
Static Moment Load	1,545 N-m
Dynamic Moment Load	595 N-m

## Interchange

Silverthin	SM17008XPO	Kaydon	K17008XPO	Kaydon	K17008XPO
------------	------------	--------	-----------	--------	-----------

## Brass; snapover separator

5/32" balls

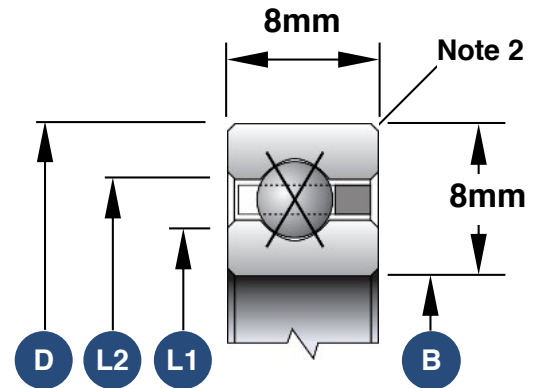

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.8mm
3. Race Width Tolerance: +0.000 -0.127mm

## Also Available

Open Angular Contact	SM17008ARO
Open Radial Contact	SM17008CPO
Open Duplexed (Back-to-Back)	SM17008BR0
Open Duplexed (Face-to-Face)	SM17008FR0