

SILVERTHIN SM34020AR0 340 mm Open Type A Thin Section Bearing

Specifications

Bore (B)	340.000 mm
Outside Diameter (D)	380.000 mm
Width	20mm
Land Diameter (L ₁)	355.000 mm
Land Diameter (L ₂)	365.000 mm
Land Diameter (L ₃)	370.000 mm
Approximate Weight	2.54 kg
Separator	Brass; one piece pocket separator
Precision Class	ABEC Class 1
Bearing Type	Angular Contact (Type A)
Seals, Shields	None (Open)
Unit System	Metric


Load Capacities

Static Radial Load	96,345 n
Dynamic Radial Load	34,870 n
Static Thrust Load	278,110 n
Dynamic Thrust Load	87,490 n

Interchange

Silverthin [SM34020AR0](#) Kaydon [K34020AR0](#) Kaydon [K34020AR0](#)

Brass; one piece pocket separator
3/8" balls

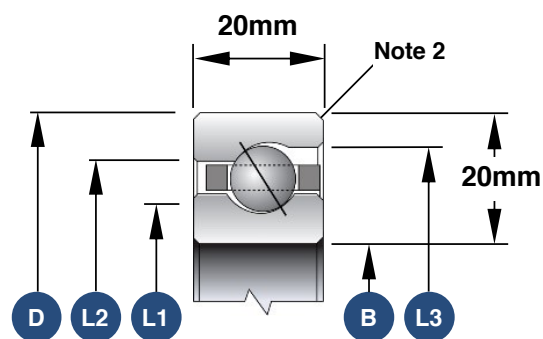

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 1.5mm
3. Race Width Tolerance: +0.000 -0.127mm

Also Available

Open Radial Contact	SM34020CP0
Open 4-Point Contact	SM34020XP0
Open Duplexed (Back-to-Back)	SM34020BR0
Open Duplexed (Face-to-Face)	SM34020FR0