

SILVERTHIN SM36013AR0 360 mm Open Type A Thin Section Bearing

Specifications

Bore (B)	360.000 mm
Outside Diameter (D)	386.000 mm
Width	13mm
Land Diameter (L ₁)	369.700 mm
Land Diameter (L ₂)	376.300 mm
Land Diameter (L ₃)	379.200 mm
Approximate Weight	1.06 kg
Separator	Brass; one piece pocket separator
Precision Class	ABEC Class 1
Bearing Type	Angular Contact (Type A)
Seals, Shields	None (Open)
Unit System	Metric

Load Capacities


Static Radial Load	64,230 n
Dynamic Radial Load	19,995 n
Static Thrust Load	185,415 n
Dynamic Thrust Load	50,950 n

Interchange

Silverthin [SM36013AR0](#) Kaydon [K36013AR0](#) Kaydon [K36013AR0](#)

Brass; one piece pocket separator

1/4" balls

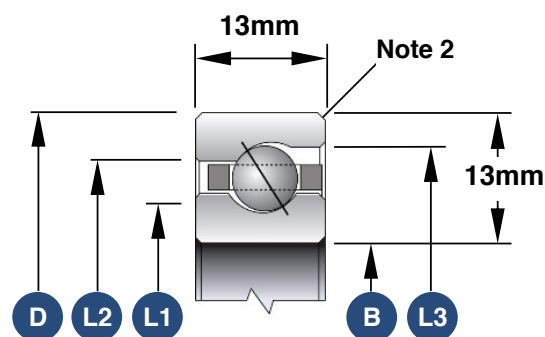

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 1.5mm
3. Race Width Tolerance: +0.000 -0.127mm

Also Available

Open Radial Contact	SM36013CP0
Open 4-Point Contact	SM36013XP0
Open Duplexed (Back-to-Back)	SM36013BR0
Open Duplexed (Face-to-Face)	SM36013FR0