

**SILVERTHIN JSU075CP0****7.5 in Sealed Type C Thin Section Bearing****Specifications**

Bore (B)	7.500 in
Outside Diameter (D)	8.250 in
Width	1/2"
Land Diameter (L <sub>1</sub> )	7.777 in
Land Diameter (L <sub>2</sub> )	7.973 in
Approximate Weight	0.99 lbs
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	Radial Contact (Type C)
Seals, Shields	Buna N Rubber Seal
Unit System	Inch

**Load Capacities**


Static Radial Load	3,791 lbf
Dynamic Radial Load	1,515 lbf
Torque Max No Load	9 in-lbs

**Interchange**

Silverthin	<a href="#">JSU075CP0</a>	Kaydon	<a href="#">JU075CP0</a>	Kaydon	<a href="#">JU075CP0</a>	INA	<a href="#">CSCU0752RS</a>
SKF	<a href="#">FPCU7082RS1</a>	FAG	<a href="#">L10SG7082RSD</a>	NSK	<a href="#">NBC19012DD</a>	NTN	<a href="#">KRJ075LL</a>
SSB	<a href="#">RJU075CP0</a>	RBC	<a href="#">JU075CP0*RBC</a>				

**Brass; snapover separator**

3/16" balls

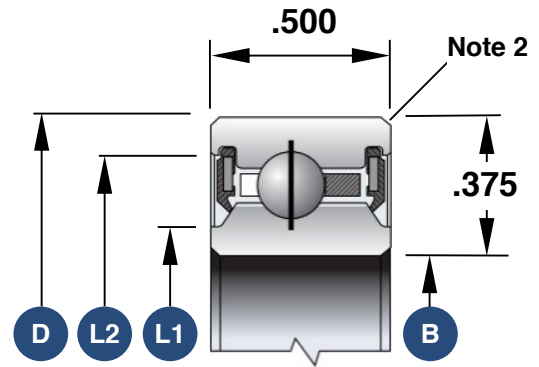

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.040"
3. Race Width Tolerance: +0.000 -0.005"

**Also Available**

Open Angular Contact	<a href="#">SC075AR0</a>
Open Radial Contact	<a href="#">SC075CP0</a>
Open 4-Point Contact	<a href="#">SC075XP0</a>
Sealed 4-Point Contact	<a href="#">JSU075XP0</a>
Open Duplexed (Back-to-Back)	<a href="#">SC075BR0</a>
Open Duplexed (Face-to-Face)	<a href="#">SC075FR0</a>