

SILVERTHIN SM11008XPO 110 mm Open Type X Thin Section Bearing

Specifications

Bore (B)	110.000 mm
Outside Diameter (D)	126.000 mm
Width	8mm
Land Diameter (L ₁)	115.900 mm
Land Diameter (L ₂)	120.100 mm
Approximate Weight	0.15 kg
Separator	Brass; snapover separator
Precision Class	ABEC Class 1
Bearing Type	4-Point Contact (Type X)
Seals, Shields	None (Open)
Unit System	Metric

Load Capacities


Static Radial Load	11,385 n
Dynamic Radial Load	6,940 n
Static Thrust Load	28,465 n
Dynamic Thrust Load	10,695 n
Static Moment Load	670 N-m
Dynamic Moment Load	305 N-m

Interchange

Silverthin	SM11008XPO	Kaydon	K11008XPO	Kaydon	K11008XPO
------------	------------	--------	-----------	--------	-----------

Brass; snapover separator

5/32" balls

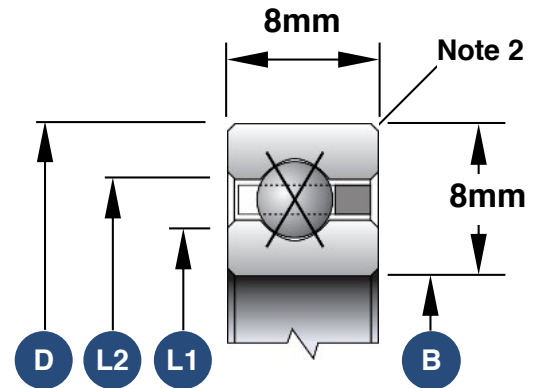

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 0.8mm
3. Race Width Tolerance: +0.000 -0.127mm

Also Available

Open Angular Contact	SM11008ARO
Open Radial Contact	SM11008CPO
Open Duplexed (Back-to-Back)	SM11008BRO
Open Duplexed (Face-to-Face)	SM11008FRO